

PROFITEST PVsUN and PVsUN MEMO

Test Instrument for Testing PV Modules and Strings per DIN EN 62446 (VDE 0126-23)

3-349-671-03
9/7.15

- **Voltage measurement:** 0 to 1000 V DC
- **Current measurement (direct):** 0 to 20 A DC
- **Insulation resistance measurement**
Measuring range: 0 to 20 MΩ
Test voltages: 250, 500 and 1000 V DC
- **Polarity test**
- **Ground fault measurement:** 0 to 1000 V DC
- **Testing for protective conductor continuity:** 0 to 10 Ω
- **Backlit LCD panel**
- **Compact and rugged:**
for service calls under harsh conditions
- **Extensive accessories**



PROFITEST PVsUN

PROFITEST PVsUN MEMO

- **Bidirectional USB interface**
- **Integrated memory** (> 10,000 data records)
- **PC software** (preparation of individual test structures, read-out and evaluation of measured values)

PROFITEST PVsUN-SOR

- Sensor for acquiring irradiation, temperature and inclination angle



PROFITEST PVsUN MEMO

Applications

With the PROFITEST PVsUN, all required electrical safety tests at photovoltaic systems can be executed simply and safely in accordance with DIN EN 62446.

The test instrument is suitable for testing PV modules and strings with up to 1000 V / 20 A.

In addition to insulation measurement, polarity testing and ground fault testing, protective conductor continuity can also be tested.

The tester is distinguished by its ergonomic design and easy handling with a weight of only 500 g.

Applicable Regulations and Standards

Regulations and standards in accordance with which the test instrument is manufactured and tested:

IEC 61010-1 / EN 61010-1 / VDE 0411-1	Safety requirements for electrical equipment for measurement, control and laboratory use – General requirements
EN 60529 VDE 0470, part 1	Test instruments and test procedures Degrees of protection provided by enclosures (IP code)
DIN EN 61326-1 VDE 0843-20-1	Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements

Regulations and Standards for Use of the Test Instrument

IEC 62446 VDE 0126-23	Grid connected photovoltaic systems – Minimum requirements for system documentation, commissioning tests and inspection
-----------------------	---

PROFITEST PVSUN and PVSUN MEMO

Test Instrument for Testing PV Modules and Strings per DIN EN 62446 (VDE 0126-23)

Characteristic Values

Voltage Measurement U₀

Measuring range	0 to 1000 V DC (no transient voltages)
Resolution	1 V
Accuracy	±(2% rdg. + 1 d)

Current (direct)

Measuring range	0 to 20 A DC, measuring time < 1 s
Voltage range	2 to 1000 V DC
Resolution	0.1 A
Accuracy	±(1% rdg. + 1 d)
Overcurrent protection	max. 24 A (shutdown of internal circuit)

Insulation Resistance Measurement R_{ISO}

Test voltage	250 V DC	500 V DC	1000 V DC
Measuring range	0.5 MΩ to 1 MΩ	1 MΩ to 20 MΩ	1 MΩ to 20 MΩ
Resolution	0.1 MΩ	1 MΩ	1 MΩ
Accuracy	±(1% rdg. + 1 d)	±(1% rdg. + 2 d)	±(1% rdg. + 2 d)
Limit value	> 0.5 MΩ	> 1 MΩ	> 1 MΩ
Number of measurements	approx. 1000 (with battery set per IEC LR6)		

Earth Fault Measurement

Measuring range	0 to 1000 V DC
Resolution	1 V
Accuracy	±(5% rdg. + 1 d)

Low-resistance measurement

Measuring range	0 to 10 Ω
Test Current	> 200 mA
Resolution	0.1 Ω
Accuracy	±(1% rdg. + 1 d)
Number of measurements	approx. 500 low-resistance measurements (batteries: 1.5 V per IEC LR6)

Display

LCD	Multiple display with background illumination Dot matrix: 128 x 64 pixels
-----	--

Reference Conditions

Ambient temperature	+ 23 °C ± 2 K
Relative humidity	40 to 75%
Battery voltage	6 V ± 1 V

Ambient Conditions

Operating temperature	0 to 40 °C
Storage temperature	-10 °C to 60 °C
Relative humidity	< 80%, no condensation allowed
Elevation	max. 2000 m above sea level

Power Supply

Batteries	4 ea. 1.5 V IEC LR6, AA, AM3, MN1500
Consumption	approx. 20 µA when switched off approx. < 30 mA during normal operation approx. 190 mA with background illumination

Electrical Safety

Voltage range	1000 V
---------------	--------

Electromagnetic Compatibility (EMC)

EMC directive	EMC 2004/108/EC
Basic standard	EN 61326-1:2006

Data Memory (PROFITEST PVSUN MEMO only)

Memory capacity	max. 10,240 data records
Memory type	non-volatile flash memory (data are retained even if batteries are depleted)

Data Interface (PROFITEST PVSUN MEMO only)

Type	USB 2.0 (USB 2.0 full speed (12 Mbps) compatible)
Port	mini USB type B (5-pin)
Cable	USB 2.0 cable (A plug mini B plug)

Mechanical Design

Protection	Housing: IP 42 per DIN VDE 0470 part 1/EN 60529
Dimensions	209 x 98 x 35 mm
Weight	approx. 500 g with batteries

PROFITEST PV_{SUN} and PROFITEST PV_{SUN} MEMO Test Instrument for Testing PV Modules and Strings per DIN EN 62446 (VDE 0126-23)

Scope of Delivery

- 1 PROFITEST PV_{SUN} or PROFITEST PV_{SUN} MEMO test instrument
- 1 Set of 4 batteries, 1.5 V IEC LR6 (AA)
- 3 Safety measurement cables, 1.5 m, red, blue and yellow:
banana plug – banana plug
- 1 Solar plug adapter, red: MC3 socket – banana socket
- 1 Solar plug adapter, red: MC4 socket – banana socket
- 1 Solar plug adapter, blue: MC3 plug – banana socket
- 1 Solar plug adapter, blue: MC4 socket – banana socket
- 1 Plug-on safety test probe with socket, red
- 1 Plug-on safety alligator clip with socket, yellow-gray
- 1 Carrying case with foam insert
- 1 Set of operating instructions
- 1 PC software (PROFITEST PV_{SUN} MEMO only)
can be downloaded from our website at:
www.gossenmetrawatt.com
- 1 USB interface cable (PROFITEST PV_{SUN} MEMO only)

Included Accessories

Safety Measurement Cables and Solar Plug Adapters



Carrying Case



Optional Accessories


PROFITEST PV_{SUN}-SOR (Z360N)




PV Adapter Set MC3-MC4 (Z360K)



PV Adapter Set SUNCLIX-MC4 (Z360H)

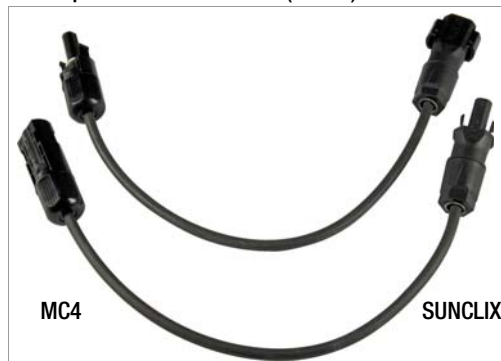


PV Adapter Set TYCO-MC4 (Z360J)

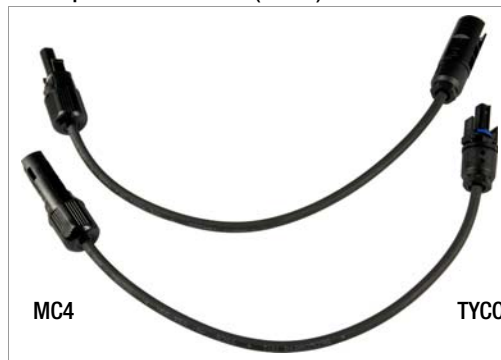

PROFITEST PVSUN and PVSUN MEMO

Test Instrument for Testing PV Modules and Strings per DIN EN 62446 (VDE 0126-23)

Magnetic measuring tips (patent) with magnetic strain relief (Z502Y)

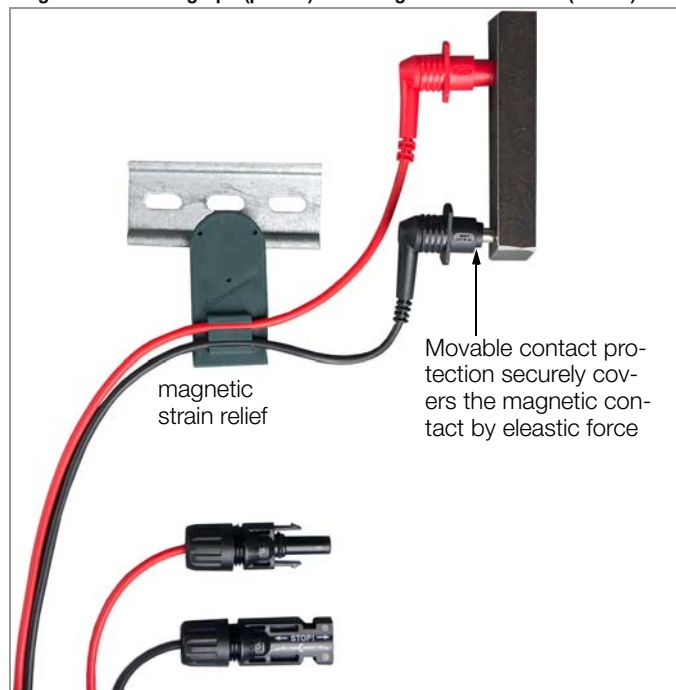

Order Information

Description	Type	Article Number
Test instrument for testing PV modules and strings with up to 1.000 V / 20 A per DIN EN 62446. Insulation measurement with up to 1.000 V test voltage, polarity test, ground fault test and protective conductor continuity test. With measurement cables and adapters in test case.	PROFITEST PVSUN	M360C ¹
same as PROFITEST PVSUN, additionally with internal memory, bi-directional interface, software and USB interface cable	PROFITEST PVSUN MEMO	M360D ¹
Test equipment consisting of PROFITEST PVSUN MEMO, PROFITEST PVSUN-SOR, Set 2 – Magnetic Measuring Tips and test case	PV SUN PACKAGE	M360E
Sensor for irradiation, temperature and inclination angle for PROFITEST PVSUN and PROFITEST PVSUN MEMO	PROFITEST PVSUN-SOR	Z360N ^D
Solar connection cable, length 300 mm, diameter 4 mm	PV Adapter Set MC3-MC4	Z360K
Solar connection cable, length 300 mm, diameter 4 mm	PV Adapter Set SUNCLIX-MC4	Z360H
Solar connection cable, length 300 mm, diameter 4 mm	PV Adapter Set TYCO-MC4	Z360J
2 magnetic measuring tips with contact protection – Set with magnetic holder 5,5 mm in diameter insulated with MC4 plug (for Photovoltaic Tester), CAT III 1.000 V / 4 A, temperature between –10 °C and 60 °C, under standard conditions and flat-head screws holding force 1.200 g vertical to contact area	Set 2 – Magnetic Measuring Tips	Z502Y

^D datasheet available

¹ DAKS calibration certificate optionally available

Service van EURO-INDEX

EURO-INDEX verleent service op alle meetinstrumenten uit haar leveringspakket en biedt de faciliteiten, kennis en hoog gekwalificeerd personeel voor (preventief) onderhoud, reparatie en kalibratie van uw meetinstrumenten.

Geautoriseerd Service Centrum

EURO-INDEX is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum.

Dit betekent dat uw instrumenten worden behandeld door goed opgeleid en kundig personeel, dat beschikt over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen gebruikt en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

Service- en kalibratielaboratorium

EURO-INDEX beschikt over een bijzonder modern service- en kalibratielaboratorium met RvA accreditatie naar NEN-EN-ISO/IEC 17025. Deze accreditatie geldt voor verschillende grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105.



KWS®

KWS is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie. Veel zaken worden voor u geregeld, zodat u zonder zorgen gebruik kunt maken van uw meetinstrumenten. De kosten zijn laag en voorspelbaar.

Digitale toegang tot uw kalibratiecertificaten met Mijn KWS

Via het Mijn KWS webportal heeft u altijd en overal toegang tot uw kalibratiecertificaten en gerelateerde documenten.

Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Deskundig advies
- Instrumenten worden geleverd met accessoirepakket en herleidbaar kalibratiecertificaat

EURO-INDEX Academy

- Producttrainingen (individueel en klassikaal)
- Seminars
- Demonstratie- en instructievideo's

Bekijk de video op ons YouTube kanaal en ontdek alles over KWS



Servicebalie



Kalibratie rookgasanalyse



Seminars en workshops



Kalibratie thermografie

Wijzigingen voorbehouden EURO-INDEX® VL 18001

Het Bluetooth® woord- en beeldmerk zijn eigendom van Bluetooth SIG, Inc. Gebruik van deze merken door EURO-INDEX geschiedt onder licentie.



BELGIË
Leuvensesteenweg 607
1930 Zaventem
T: 02 - 757 92 44
F: 02 - 757 92 64
info@euro-index.be
www.euro-index.be

NEDERLAND
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: +31 - (0)10 - 2 888 000
F: +31 - (0)10 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl

